

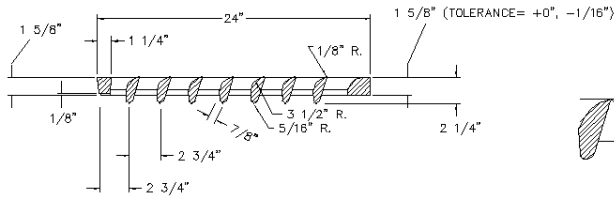



SLOT FORMED AND RECESSED FOR 5/8" - 11 NC x 2" SOCKET HEAD (ALLEN HEAD) CAP SCREW.

1 5/8" (TOLERANCE = +0", -1/16")



NOTES:  
WSDOT STD B2B

# OLYMPIC FOUNDRY INC.

20" X 24" REVERSIBLE LOCKING FRAME & VANED GRATE

MATL: Frame; Cast Iron ASTM A48 CL30. Grate; Ductile Iron ASTM A536 CL80-55-06

RATING: H-20

PART NO. SM60V D/T

APPROX WT: Frame 160 Lbs, Grate 104 Lbs

REV: A DATE: 7/3/2003 New border

REV  
A

DOCUMENT APPROVED  
BY: DATE:

DWN: CL DATE: 7/3/2003

TOLERANCE  
XX +.1  
XXX +.06  
XXXX +.030  
<+ 2 DEG

CHKD: CL DATE: 7/3/2003

REV: DATE:

DWG #: SM60 VANED DT

SCALE: N/A

SHEET: 1 OF 1